

Procedural and Object-Oriented Programming

- **Procedural programming** focuses on the process/actions that occur in a program
- **Object-Oriented programming** is based on the data and the functions that operate on it. Objects are instances of ADTs that represent the data and its functions

Addison-Wesley
is an imprint of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Limitations of Procedural Programming

- If the data structures change, many functions must also be changed
- Programs that are based on complex function hierarchies are:
 - difficult to understand and maintain
 - difficult to modify and extend
 - easy to break

Addison-Wesley
is an imprint of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Object-Oriented Programming Terminology

- **class**: like a `struct` (allows bundling of related variables), but variables and functions in the class can have different properties than in a `struct`
- **object**: an instance of a `class`, in the same way that a variable can be an instance of a `struct`

Addison-Wesley
is an imprint of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Classes and Objects

- A `Class` is like a blueprint and objects are like houses built from the blueprint

Blueprint that describes a house.

Instances of the house described by the blueprint.

Addison-Wesley
is an imprint of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Object-Oriented Programming Terminology

- **attributes:** members of a class
- **methods or behaviors:** member functions of a class

Addison-Wesley
3rd printing of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

More on Objects

- **data hiding:** restricting access to certain members of an object
- **public interface:** members of an object that are available outside of the object. This allows the object to provide access to some data and functions without sharing its internal details and design, and provides some protection from data corruption

Addison-Wesley
3rd printing of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

13.2

Introduction to Classes



Addison-Wesley
3rd printing of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Introduction to Classes

- Objects are created from a `class`
- **Format:**

```
class ClassName
{
    declaration;
    declaration;
};
```

Addison-Wesley
3rd printing of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Class Example

```
class Rectangle
{
private:
    double width;
    double length;
public:
    void setWidth(double);
    void setLength(double);
    double getWidth() const;
    double getLength() const;
    double getArea() const;
};
```

Addison-Wesley
3rd printing of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Access Specifiers

- Used to control access to members of the class
- **public:** can be accessed by functions outside of the class
- **private:** can only be called by or accessed by functions that are members of the class

Addison-Wesley
3rd printing of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Class Example

```
class Rectangle
{
    private:
        double width;
        double length;
    public:
        void setWidth(double);
        void setLength(double);
        double getWidth() const;
        double getLength() const;
        double getArea() const;
};
```

← Private Members

← Public Members

Addison-Wesley
is an imprint of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

More on Access Specifiers

- Can be listed in any order in a class
- Can appear multiple times in a class
- If not specified, the default is `private`

Addison-Wesley
is an imprint of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Using `const` With Member Functions

- `const` appearing after the parentheses in a member function declaration specifies that the function will not change any data in the calling object.

```
double getWidth() const;
double getLength() const;
double getArea() const;
```

Addison-Wesley
is an imprint of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Defining a Member Function

- When defining a member function:
 - Put prototype in class declaration
 - Define function using class name and scope resolution operator (`::`)

```
int Rectangle::setWidth(double w)
{
    width = w;
}
```

Addison-Wesley
is an imprint of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Accessors and Mutators

- **Mutator:** a member function that stores a value in a private member variable, or changes its value in some way
- **Accessor:** function that retrieves a value from a private member variable. Accessors do not change an object's data, so they should be marked `const`.

Addison-Wesley
is an imprint of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.



13.3

Defining an Instance of a Class

Addison-Wesley
is an imprint of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Defining an Instance of a Class

- An object is an instance of a class
- Defined like structure variables:

```
Rectangle r;
```
- Access members using dot operator:

```
r.setWidth(5.2);  
cout << r.getWidth();
```
- Compiler error if attempt to access private member using dot operator

Addison-Wesley
LearningIt!

PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Program 13-1

```
1 // This program demonstrates a simple class.
2 #include <iostream>
3 using namespace std;
4
5 // Rectangle class declaration.
6 class Rectangle
7 {
8     private:
9         double width;
10        double length;
11    public:
12        void setWidth(double);
13        void setLength(double);
14        double getWidth() const;
15        double getLength() const;
16        double getArea() const;
17 };
18
19 //*****
20 // setWidth assigns a value to the width member. *
21 //*****
22
23 void Rectangle::setWidth(double w)
24 {
25     width = w;
26 }
27
28 //*****
29 // setLength assigns a value to the length member. *
30 //*****
31
```

Addison-Wesley
LearningIt!

PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Program 13-1 (Continued)

```
32 void Rectangle::setLength(double len)
33 {
34     length = len;
35 }
36
37 //*****
38 // getWidth returns the value in the width member. *
39 //*****
40
41 double Rectangle::getWidth() const
42 {
43     return width;
44 }
45
46 //*****
47 // getLength returns the value in the length member. *
48 //*****
49
50 double Rectangle::getLength() const
51 {
52     return length;
53 }
54
```

Addison-Wesley
LearningIt!

PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Program 13-1 (Continued)

```
55 //*****
56 // getArea returns the product of width times length. *
57 //*****
58
59 double Rectangle::getArea() const
60 {
61     return width * length;
62 }
63
64 //*****
65 // Function main *
66 //*****
67
68 int main()
69 {
70     Rectangle box; // Define an instance of the Rectangle class
71     double rectWidth; // Local variable for width
72     double rectLength; // Local variable for length
73
74     // Get the rectangle's width and length from the user.
75     cout << "This program will calculate the area of a\n";
76     cout << "rectangle. What is the width? ";
77     cin >> rectWidth;
78     cout << "What is the length? ";
79     cin >> rectLength;
80
81     // Store the width and length of the rectangle
82     // in the box object.
83     box.setWidth(rectWidth);
84     box.setLength(rectLength);
85
```

Addison-Wesley
LearningIt!

PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Program 13-1 (Continued)

```
85
86 // Display the rectangle's data.
87 cout << "Here is the rectangle's data:\n";
88 cout << "Width: " << box.getWidth() << endl;
89 cout << "Length: " << box.getLength() << endl;
90 cout << "Area: " << box.getArea() << endl;
91 return 0;
92 }
```

Program Output

```
This program will calculate the area of a
rectangle. What is the width? 10 [Enter]
What is the length? 5 [Enter]
Here is the rectangle's data:
Width: 10
Length: 5
Area: 50
```

Addison-Wesley
LearningIt!

PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Avoiding Stale Data

- Some data is the result of a calculation.
- In the Rectangle class the area of a rectangle is calculated.
 - length x width
- If we were to use an area variable here in the Rectangle class, its value would be dependent on the length and the width.
- If we change length or width without updating area, then area would become *stale*.
- To avoid stale data, it is best to calculate the value of that data within a member function rather than store it in a variable.

Addison-Wesley
LearningIt!

PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Pointer to an Object

- Can define a pointer to an object:

```
Rectangle *rPtr = nullptr;
```

- Can access public members via pointer:

```
rPtr = &otherRectangle;
rPtr->setLength(12.5);
cout << rPtr->getLength() << endl;
```

Addison-Wesley
3 as imprint of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley All rights reserved.

Dynamically Allocating an Object

- We can also use a pointer to dynamically allocate an object.

```
1 // Define a Rectangle pointer.
2 Rectangle *rectPtr = nullptr;
3
4 // Dynamically allocate a Rectangle object.
5 rectPtr = new Rectangle;
6
7 // Store values in the object's width and length.
8 rectPtr->setWidth(10.0);
9 rectPtr->setLength(15.0);
10
11 // Delete the object from memory.
12 delete rectPtr;
13 rectPtr = nullptr;
```

Addison-Wesley
3 as imprint of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley All rights reserved.

13.4

Why Have Private Members?

Why Have Private Members?

- Making data members `private` provides data protection
- Data can be accessed only through `public` functions
- Public functions define the class's public interface


Addison-Wesley
3 as imprint of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley All rights reserved.

Addison-Wesley
3 as imprint of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley All rights reserved.

Code outside the class must use the class's public member functions to interact with the object.



Addison-Wesley
3 as imprint of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley All rights reserved.

13.5

Separating Specification from Implementation

Addison-Wesley
3 as imprint of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley All rights reserved.

Separating Specification from Implementation

- 1 Place class declaration in a header file that serves as the class specification file. Name the file `ClassName.h`, for example, `Rectangle.h`
- 2 Place member function definitions in `ClassName.cpp`, for example, `Rectangle.cpp`. File should `#include` the class specification file
- 3 Programs that use the class must `#include` the class specification file, and be compiled and linked with the member function definitions

Addison-Wesley
Learning Technology

PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.



13.6

Inline Member Functions

Addison-Wesley
Learning Technology

PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Inline Member Functions

- 1 Member functions can be defined
 - 2 inline: in class declaration
 - 3 after the class declaration
- 4 Inline appropriate for short function bodies:

```
int getWidth() const
{ return width; }
```

Addison-Wesley
Learning Technology

PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Rectangle Class with Inline Member Functions

```
1 // Specification file for the Rectangle class
2 // This version uses some inline member functions.
3 #ifndef RECTANGLE_H
4 #define RECTANGLE_H
5
6 class Rectangle
7 {
8     private:
9         double width;
10        double length;
11    public:
12        void setWidth(double);
13        void setLength(double);
14
15        double getWidth() const
16            { return width; }
17
18        double getLength() const
19            { return length; }
20
21        double getArea() const
22            { return width * length; }
23 };
24 #endif
```

Addison-Wesley
Learning Technology

PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Tradeoffs – Inline vs. Regular Member Functions

- 1 Regular functions – when called, compiler stores return address of call, allocates memory for local variables, etc.
- 2 Code for an inline function is copied into program in place of call – larger executable program, but no function call overhead, hence faster execution

Addison-Wesley
Learning Technology

PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.



13.7

Constructors

Addison-Wesley
Learning Technology

PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Constructors

- 1 Member function that is automatically called when an object is created
- 2 Purpose is to construct an object
- 3 Constructor function name is class name
- 4 Has no return type

Addison-Wesley
Learning Technology

PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Contents of Rectangle.h (Version 3)

```

1 // Specification file for the Rectangle class
2 // This version has a constructor.
3 #ifndef RECTANGLE_H
4 #define RECTANGLE_H
5
6 class Rectangle
7 {
8     private:
9         double width;
10        double length;
11    public:
12        Rectangle(); // Constructor
13        void setWidth(double);
14        void setLength(double);
15
16        double getWidth() const
17        { return width; }
18
19        double getLength() const
20        { return length; }
21
22        double getArea() const
23        { return width * length; }
24 };
25 #endif

```

Addison-Wesley
Learning Technology

PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Contents of Rectangle.cpp (Version 3)

```

1 // Implementation file for the Rectangle class.
2 // This version has a constructor.
3 #include "Rectangle.h" // Needed for the Rectangle class
4 #include <iostream> // Needed for cout
5 #include <cstdlib> // Needed for the exit function
6 using namespace std;
7
8 //*****
9 // The constructor initializes width and length to 0.0. *
10 //*****
11
12 Rectangle::Rectangle()
13 {
14     width = 0.0;
15     length = 0.0;
16 }

```

Continues...

Addison-Wesley
Learning Technology

PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Contents of Rectangle.cpp Version3

```

17 //*****
18 // setWidth sets the value of the member variable width. *
19 //*****
20
21 void Rectangle::setWidth(double w)
22 {
23     if (w >= 0)
24         width = w;
25     else
26     {
27         cout << "Invalid width\n";
28         exit(EXIT_FAILURE);
29     }
30 }
31
32 //*****
33 // setLength sets the value of the member variable length. *
34 //*****
35
36 void Rectangle::setLength(double len)
37 {
38     if (len >= 0)
39         length = len;
40     else
41     {
42         cout << "Invalid length\n";
43         exit(EXIT_FAILURE);
44     }
45 }
46 }

```

(continued)

Addison-Wesley
Learning Technology

PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Program 13-7

```

1 // This program uses the Rectangle class's constructor.
2 #include <iostream>
3 #include "Rectangle.h" // Needed for Rectangle class
4 using namespace std;
5
6 int main()
7 {
8     Rectangle box; // Define an instance of the Rectangle class
9
10    // Display the rectangle's data.
11    cout << "Here is the rectangle's data:\n";
12    cout << "Width: " << box.getWidth() << endl;
13    cout << "Length: " << box.getLength() << endl;
14    cout << "Area: " << box.getArea() << endl;
15    return 0;
16 }

```

Program Output

```

Here is the rectangle's data:
Width: 0
Length: 0
Area: 0

```

Addison-Wesley
Learning Technology

PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Default Constructors


- 1 A default constructor is a constructor that takes no arguments.
- 2 If you write a class with no constructor at all, C++ will write a default constructor for you, one that does nothing.
- 3 A simple instantiation of a class (with no arguments) calls the default constructor:

```
Rectangle r;
```

Addison-Wesley
Learning Technology

PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.



13.8

Passing Arguments to Constructors

Addison-Wesley
is an imprint of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Passing Arguments to Constructors

- To create a constructor that takes arguments:
 - indicate parameters in prototype:


```
Rectangle(double, double);
```
 - Use parameters in the definition:


```
Rectangle::Rectangle(double w, double len)
{
    width = w;
    length = len;
}
```

Addison-Wesley
is an imprint of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Passing Arguments to Constructors

- You can pass arguments to the constructor when you create an object:


```
Rectangle r(10, 5);
```

Addison-Wesley
is an imprint of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

More About Default Constructors

- If all of a constructor's parameters have default arguments, then it is a default constructor. For example:


```
Rectangle(double = 0, double = 0);
```
- Creating an object and passing no arguments will cause this constructor to execute:


```
Rectangle r;
```

Addison-Wesley
is an imprint of
PEARSON


Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Classes with No Default Constructor

- When all of a class's constructors require arguments, then the class has NO default constructor.
- When this is the case, you must pass the required arguments to the constructor when creating an object.

Addison-Wesley
is an imprint of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.



13.9

Destructors

Addison-Wesley
is an imprint of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Destructors

- Member function automatically called when an object is destroyed
- Destructor name is ~classname, e.g., ~Rectangle
- Has no return type; takes no arguments
- Only one destructor per class, i.e., it cannot be overloaded
- If constructor allocates dynamic memory, destructor should release it

Addison-Wesley
LearningStyle

PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Contents of InventoryItem.h (Version 1)

```

1 // Specification file for the InventoryItem class.
2 #ifndef INVENTORYITEM_H
3 #define INVENTORYITEM_H
4 #include <string> // Needed for strlen and strcpy
5
6 // InventoryItem class declaration.
7 class InventoryItem
8 {
9 private:
10 char *description; // The item description
11 double cost; // The item cost
12 int units; // Number of units on hand

```

Addison-Wesley
LearningStyle

PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Contents of InventoryItem.h Version 1

```

13 public:
14 // Constructor
15 InventoryItem(char *desc, double c, int u)
16 { // Allocate just enough memory for the description.
17   description = new char (strlen(desc) + 1);
18
19   // Copy the description to the allocated memory.
20   strcpy(description, desc);
21
22   // Assign values to cost and units.
23   cost = c;
24   units = u;
25
26 // Destructor
27 ~InventoryItem()
28 { delete [] description; }
29
30 const char *getDescription() const
31 { return description; }
32
33 double getCost() const
34 { return cost; }
35
36 int getUnits() const
37 { return units; }
38 };
39 #endif

```

(continued)

Addison-Wesley
LearningStyle

PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Program 13-12

```

1 // This program demonstrates a class with a destructor.
2 #include <iostream>
3 #include "ContactInfo.h"
4 using namespace std;
5
6 int main()
7 {
8   // Define a ContactInfo object with the following data:
9   // Name: Kristen Lee Phone Number: 555-2021
10  ContactInfo entry("Kristen Lee", "555-2021");
11
12  // Display the object's data.
13  cout << "Name: " << entry.getName() << endl;
14  cout << "Phone Number: " << entry.getPhoneNumber() << endl;
15  return 0;
16 }

```

Program Output

Name: Kristen Lee
Phone Number: 555-2021

Addison-Wesley
LearningStyle

PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Constructors, Destructors, and Dynamically Allocated Objects

- When an object is dynamically allocated with the new operator, its constructor executes:

```
Rectangle *r = new Rectangle(10, 20);
```

- When the object is destroyed, its destructor executes:

```
delete r;
```

Addison-Wesley
LearningStyle

PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.



13.10

Overloading Constructors

Addison-Wesley
LearningStyle

PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Overloading Constructors

- 1 A class can have more than one constructor
- 2 Overloaded constructors in a class must have different parameter lists:

```
Rectangle();
Rectangle(double);
Rectangle(double, double);
```

Addison-Wesley
Learning Technology

PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

```
1 // This class has overloaded constructors.
2 #ifndef INVENTORYITEM_H
3 #define INVENTORYITEM_H
4 #include <string>
5 using namespace std;
6
7 class InventoryItem
8 {
9 private:
10 string description; // The item description
11 double cost; // The item cost
12 int units; // Number of units on hand
13 public:
14 // Constructor #1
15 InventoryItem()
16 { // Initialize description, cost, and units.
17 description = "";
18 cost = 0.0;
19 units = 0; }
20
21 // Constructor #2
22 InventoryItem(string desc)
23 { // Assign the value to description.
24 description = desc;
25
26 // Initialize cost and units.
27 cost = 0.0;
28 units = 0; }
```

Addison-Wesley
Learning Technology

PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Continues...

```
29
30 // Constructor #3
31 InventoryItem(string desc, double c, int u)
32 { // Assign values to description, cost, and units.
33 description = desc;
34 cost = c;
35 units = u; }
36
37 // Mutator functions
38 void setDescription(string d)
39 { description = d; }
40
41 void setCost(double c)
42 { cost = c; }
43
44 void setUnits(int u)
45 { units = u; }
46
47 // Accessor functions
48 string getDescription() const
49 { return description; }
50
51 double getCost() const
52 { return cost; }
53
54 int getUnits() const
55 { return units; }
56 };
57 #endif
```

Addison-Wesley
Learning Technology

PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Only One Default Constructor and One Destructor

- 1 Do not provide more than one default constructor for a class: one that takes no arguments and one that has default arguments for all parameters


```
Square();
Square(int = 0); // will not compile
```
- 2 Since a destructor takes no arguments, there can only be one destructor for a class

Addison-Wesley
Learning Technology

PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Member Function Overloading

- 1 Non-constructor member functions can also be overloaded:


```
void setCost(double);
void setCost(char *);
```
- 2 Must have unique parameter lists as for constructors

Addison-Wesley
Learning Technology

PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.



3.11

Using Private Member Functions

Addison-Wesley
Learning Technology

PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Using Private Member Functions

- A `private` member function can only be called by another member function
- It is used for internal processing by the class, not for use outside of the class
- See the `createDescription` function in `ContactInfo.h` (Version 2)

Addison-Wesley
3 as imprint of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.



13.12

Arrays of Objects

Addison-Wesley
3 as imprint of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Arrays of Objects

- Objects can be the elements of an array:

```
InventoryItem inventory[40];
```

- Default constructor for object is used when array is defined

Addison-Wesley
3 as imprint of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Arrays of Objects

- Must use initializer list to invoke constructor that takes arguments:

```
InventoryItem inventory[3] =  
{ "Hammer", "Wrench", "Pliers" };
```

Addison-Wesley
3 as imprint of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Arrays of Objects

- If the constructor requires more than one argument, the initializer must take the form of a function call:

```
InventoryItem inventory[3] = { InventoryItem("Hammer", 6.95, 12),  
                             InventoryItem("Wrench", 8.75, 20),  
                             InventoryItem("Pliers", 3.75, 10) };
```

Addison-Wesley
3 as imprint of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Arrays of Objects

- It isn't necessary to call the same constructor for each object in an array:

```
InventoryItem inventory[3] = { "Hammer",  
                             InventoryItem("Wrench", 8.75, 20),  
                             "Pliers" };
```

Addison-Wesley
3 as imprint of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Accessing Objects in an Array

- Objects in an array are referenced using subscripts
- Member functions are referenced using dot notation:

```
inventory[2].setUnits(30);
cout << inventory[2].getUnits();
```

Addison-Wesley
3 set imprint of

PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Program 13-14

```
1 // This program demonstrates an array of class objects.
2 #include <iostream>
3 #include <iomanip>
4 #include "InventoryItem.h"
5 using namespace std;
6
7 int main()
8 {
9     const int NUM_ITEMS = 5;
10    InventoryItem inventory[NUM_ITEMS] = {
11        InventoryItem("Hammer", 6.95, 12),
12        InventoryItem("Wrench", 8.75, 20),
13        InventoryItem("Pliers", 3.75, 10),
14        InventoryItem("Ratchet", 7.95, 14),
15        InventoryItem("Screwdriver", 2.50, 22) };
16
```

Addison-Wesley
3 set imprint of

PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Program 13-14 (Continued)

```
17    cout << setw(14) << "Inventory Item"
18    << setw(8) << "Cost" << setw(8)
19    << setw(16) << "Units on Hand\n";
20    cout << "-----\n";
21
22    for (int i = 0; i < NUM_ITEMS; i++)
23    {
24        cout << setw(14) << inventory[i].getDescription();
25        cout << setw(8) << inventory[i].getCost();
26        cout << setw(7) << inventory[i].getUnits() << endl;
27    }
28
29    return 0;
30 }
```

Program Output

Inventory Item	Cost	Units on Hand
Hammer	6.95	12
Wrench	8.75	20
Pliers	3.75	10
Ratchet	7.95	14
Screwdriver	2.5	22

Addison-Wesley
3 set imprint of

PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

13.16

The Unified Modeling Language

Addison-Wesley
3 set imprint of

PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

The Unified Modeling Language

- UML stands for *Unified Modeling Language*.
- The UML provides a set of standard diagrams for graphically depicting object-oriented systems


Addison-Wesley
3 set imprint of

PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

UML Class Diagram


- A UML diagram for a class has three main sections.

Addison-Wesley
3 set imprint of

PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Example: A Rectangle Class

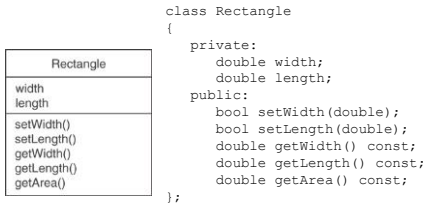

Addison-Wesley
3 an imprint of
PEARSON


Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

UML Access Specification Notation

- In UML you indicate a private member with a minus (-) and a public member with a plus (+).

These member variables are private.

These member functions are public.



Addison-Wesley
3 an imprint of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

UML Data Type Notation

- To indicate the data type of a member variable, place a colon followed by the name of the data type after the name of the variable.

```

- width : double
- length : double

```

Addison-Wesley
3 an imprint of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

UML Parameter Type Notation

- To indicate the data type of a function's parameter variable, place a colon followed by the name of the data type after the name of the variable.

```

+ setWidth(w : double)

```

Addison-Wesley
3 an imprint of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

UML Function Return Type Notation

- To indicate the data type of a function's return value, place a colon followed by the name of the data type after the function's parameter list.

```


+ setWidth(w : double) : void

```

Addison-Wesley
3 an imprint of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

The Rectangle Class



Addison-Wesley
3 an imprint of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.

Showing Constructors and Destructors

No return type listed for constructors or destructors

Constructors →

Destructor →

InventoryItem
- description : char* - cost : double - units : int - createDescription(size : int, value : char*) : void
+ InventoryItem() : + InventoryItem(desc : char*) : + InventoryItem(desc : char*, c : double, u : int) : + ~InventoryItem() : + setDescription(d : char*) : void + setCost(c : double) : void + setUnits(u : int) : void + getDescription() : char* + getCost() : double + getUnits() : int

Addison-Wesley
 A part of
PEARSON

Copyright © 2015, 2012, 2009 Pearson Education, Inc., Publishing as Addison-Wesley. All rights reserved.